


- press home button to turn on the controller
- hold home button for 3 seconds to turn off the controller
- hold home button for 8 seconds to force shutdown the controller
- the controller will turn off when placed on the dock
- plug the 2.4G receiver into the charging dock, then connect it to your Windows device or Switch dock via the USB cable for better user experience
- LED lights indicate the player number, 1 LED indicates player 1, 2 LEDs indicate player 2, 4 is the maximum number of players the controller supports for Windows, 8 players for Switch

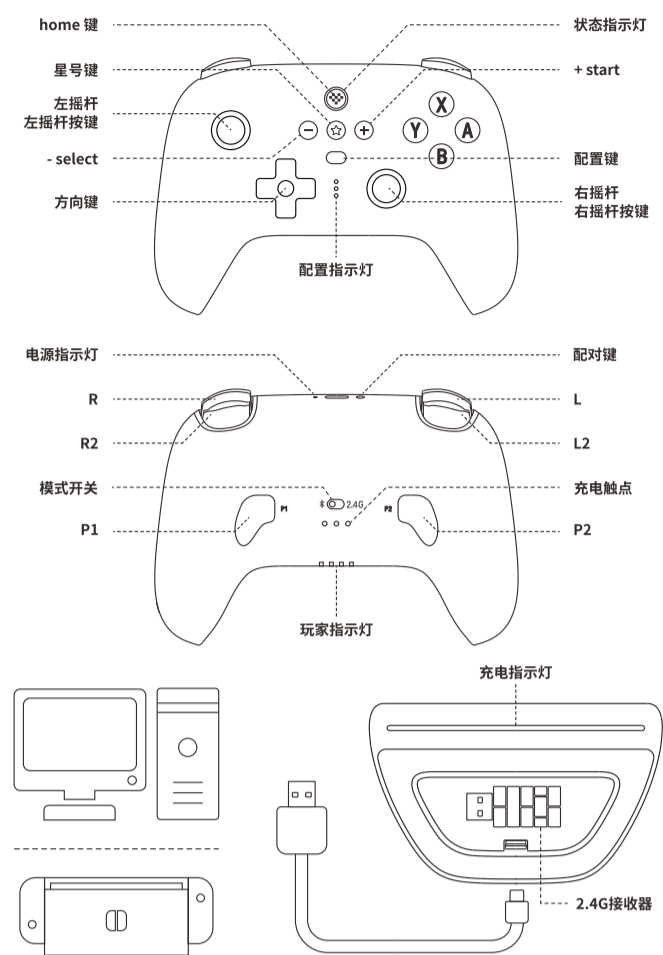

- 开机: 按下 home 键。
- 关机: 按住 home 键 3 秒。
- 强制关机: 按住 home 键 8 秒。
- 手柄置于底座时会自动关机。
- 可将 2.4G 接收器 插入底座的 USB 端口, 并通过 USB 线将底座连接到 Windows 设备或 Switch 主机使用, 以获得更佳的用户体验。
- 玩家指示灯支持显示玩家数量, 1 号玩家亮 1 颗指示灯, 以此类推; Windows 设备最多支持显示 4 个玩家, Switch 主机最多支持显示 8 个玩家。

Switch

- Switch system needs to be 3.0.0 or above
- NFC scanning, IR camera, HD rumble, notification LED are not supported

Bluetooth connection

- turn the mode switch to Bluetooth
- press home button to turn on the controller
- hold the pair button for 3 seconds to enter its pairing mode, status LED starts to blink rapidly.(this is required for the very first time only)
- go to your Switch home Page to click on Controllers, then click on Change Grip/Order
- status LED becomes solid when connection is successful

wireless connection

- OTG cable is required for Switch Lite
- go to System Setting > Controller and Sensors > Turn on [Pro Controller Wired Communication]
- connect the 2.4G receiver to the USB port of your Switch dock
- turn the mode switch to 2.4G
- press home button to turn on the controller, wait till the controller is successfully recognized by the system to play, status LED stays solid

wired connection

- OTG cable is required for Switch Lite
- go to System Setting > Controller and Sensors > Turn on [Pro Controller Wired Communication]
- connect your controller to Switch dock via USB cable, wait till the controller is successfully recognized by your Switch to play, status LED stays solid

Windows[X-input]

- required system: Windows 10 (1903) or above

wireless connection

- connect the 2.4G receiver to the USB port of your Window device
- turn the mode switch to 2.4G
- press home button to turn on the controller, wait till the controller is successfully recognized by your Windows device to play

wired connection

- connect your controller to Windows device via USB cable, wait till the controller is successfully recognized by the system to play, status LED stays solid

Turbo function

- the star button equals to screenshot function by default when it's connected to Switch, you can change it to turbo function in the 8BitDo Ultimate Software.
- Status LED blinks continuously when the button with turbo functionality is pressed.
- D-pad, joysticks are not included
- hold the button you would like to set turbo functionality to, then press the star button to activate/deactivate its turbo functionality

battery

- 22 hours of play time with a 1000mAh built-in battery pack, rechargeable with 2-3 hours charging time

controller status --	→	LED indicator --
low battery	→	red LED blinks
battery charging	→	red LED stays solid
battery fully charged	→	red LED turns off
charging dock status --	→	LED indicator --
battery charging	→	white LED stays solid
battery fully charged	→	white LED turns off

- charging time with the controller on the dock is the same as charging via USB cable

Safety Warnings

- Please always use batteries, chargers, and accessories provided by the manufacturer.
- The manufacturer is not liable for any safety issues arising from the use of non-manufacturer-approved accessories.
- Do not attempt to disassemble, modify, or repair the device yourself. Unauthorized actions may result in serious injury.
- Avoid crushing, disassembling, puncturing, or attempting to modify the device or its battery, as these actions can be dangerous.
- Any unauthorized changes or modifications to the device will void the manufacturer's warranty.

Ultimate Software

- press profile switch button to switch between 3 custom profiles. The profile indicator will not light up when using the default setting
- it gives you elite control over every piece of your controller: customize button mapping, adjust stick & trigger sensitivity, vibration control and create macros with any button combination. Please visit support.8bitdo.com for the application

Support

- please visit support.8bitdo.com for further information & additional support



连接 Switch 主机

- 要求 Switch 主机系统版本为 3.0.0 或更高版本。
- 不支持 NFC 扫描、红外摄像头、HD 震动、通知灯等功能。

蓝牙连接

- 将手柄背后的模式开关 移动到 蓝牙 位置。
- 按下 home 键 开启手柄。
- 按住 配对键 约 3 秒至 状态指示灯 快速闪烁, 使手柄处于配对状态。(仅首次连接时需要配对)
- 打开 Switch 主机手柄选项, 选择 [更改握法 / 顺序], 等待手柄与主机自动配对连接。
- 连接完成后, 状态指示灯 常亮显示。

无线连接

- Lite 机型需要使用 OTG 转接线。
- 请确保 [设置] - [手柄与感应器] - [Pro 手柄的有线连接] 功能已开启。
- 将配备的 2.4G 接收器 连接到 Switch 主机底座的 USB 端口。
- 将手柄背后的模式开关 移动到 2.4G 位置。
- 按下 home 键 开启手柄, 等待系统识别完成后, 状态指示灯 常亮。

有线连接

- Lite 机型需要使用 OTG 转接线。
- 请确保 [设置] - [手柄与感应器] - [Pro 手柄的有线连接] 功能已开启。
- 使用 USB 线将手柄连接到 Switch 主机底座的 USB 端口, 等待系统识别完成后, 状态指示灯 常亮。

连接 Windows 设备

- 要求 Windows 设备系统版本为 Windows 10 (1903) 或更高版本。

无线连接

- 将配备的 2.4G 接收器 连接到 Windows 设备的 USB 端口。
- 将手柄背后的模式开关 移动到 2.4G 位置。
- 按下 home 键 开启手柄, 等待系统识别完成后, 状态指示灯 常亮。

有线连接

- 使用 USB 线将手柄连接到 Windows 设备的 USB 端口, 等待系统识别完成后, 状态指示灯 常亮。

连发功能

- 连接 Switch 时 星号键 默认为截图功能, 可通过精英软件修改为连发功能。
- 已开启连发功能的按键, 按下时 状态指示灯 会持续闪烁。
- 方向键、左摇杆、右摇杆 不支持连发。
- 按住需要设置连发的功能键, 再按下 星号键 可开启 / 关闭连发。

电源

- 配备 1000mAh 可充电式锂电池, 可持续使用约 22 小时, 充电时间约 2-3 小时。

手柄电源状态 --	→	电源指示灯状态 --
电量不足	→	红灯闪烁
正在充电	→	红灯常亮
充电完成	→	红灯熄灭
底座电源状态 --	→	充电指示灯状态 --
正在充电	→	白灯常亮
充电完成	→	白灯熄灭

- 手柄置于底座的充电时长与 USB 充电一致。

安全警示

- 请使用制造商的电池、充电器、配件。
- 在使用使用第三方的配件时, 制造商不能对用户的安全负责。
- 请勿自行拆卸、改装或修理设备。
- 请勿挤压、拆解、刺穿或尝试改装设备及电池。
- 对设备的任意变动或改装, 将导致制造商对设备不予保修。

自定义配置

- 配置后可按下 配置键 切换不同的配置, 默认无配置。
- 请访问 app.8bitdo.cn 获取精英软件, 可对手柄按键映射、摇杆灵敏度、扳机键灵敏度、震动强度以及宏等功能进行自定义配置。

技术支持

- 请访问 support.8bitdo.cn 了解详细信息。

