


Xinput, Dinput, X/Y, DPAD,
TURBO, PAIR, SELECT

START

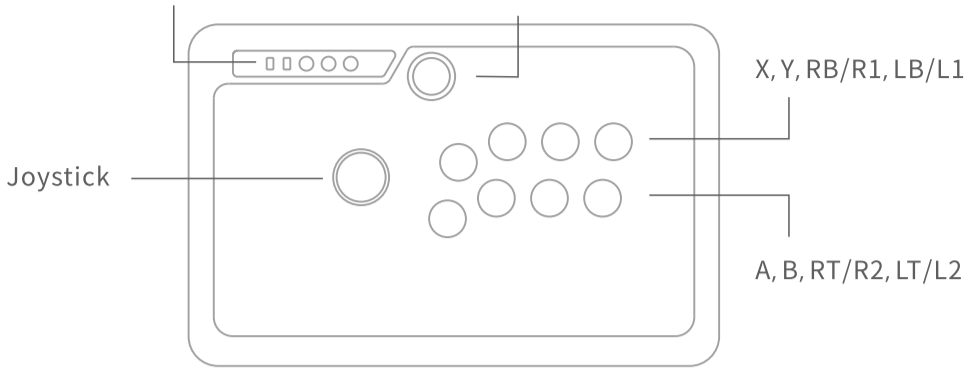

Bluetooth Connection

- N30 Arcade Stick will auto reconnect to your devices once it has been successfully paired.

Android (D-Input)

- Select DINPUT MODE via DINPUT/XINPUT switch, then press START to power on the joystick. Blue LED will blink once per cycle.
 - Press and hold PAIRING button for 2 seconds to enter pairing mode. Blue LED will rapidly blink.
 - Enter your device's Bluetooth setting to pair with [8Bitdo xx Arcade]. LED will be solid blue when connection is successful.
- USB Connection: connect your N30 Arcade Stick to your Android device via USB Cable after step 1.

Windows (X-Input)

- Select XINPUT MODE via DINPUT/XINPUT switch, then press START to power on the joystick. Blue LED will blink twice per cycle.
 - Press and hold PAIRING button for 2 seconds to enter pairing mode. Blue LED will rapidly blink.
 - Enter your device's Bluetooth setting to pair with [8Bitdo xx Arcade(x)]. LED will be solid blue when connection is successful.
- USB Connection: connect your N30 Arcade Stick to your Windows device via USB Cable after step 1.
 - D-input and X-input modes can be interchanged while playing.

macOS

- Press and hold START + A to power on the joystick. Blue LED will blink three time per cycle.
 - Press and hold PAIRING button for 2 seconds to enter pairing mode. Blue LED will rapidly blink.
 - Enter your device's Bluetooth setting to pair with [Wireless Controller]. LED will be solid blue when connection is successful.
- USB Connection: connect your N30 Arcade Stick to your macOS device via USB Cable after step 1.

Switch (by default)

- Press and hold START + Y to power on the joystick. Blue LED will blink four time per cycle.
 - Press and hold PAIRING button for 2 seconds to enter pairing mode. Blue LED will rapidly blink.
 - Go to your Switch Home Page to click on Controllers, then click on Change Grip/Order.
 - Blue LED will be solid blue when connection is successful.
- When connected to your Switch, DOWN + SELECT = Switch HOME button.

Battery

Low battery mode	Red blinking LED
Battery charging	Green blinking LED
Battery fully charged	Green LED turns off

- Built-in 480 mAh Li-on.
- 18 Hours of play time.
- Rechargeable via USB cable with 1 – 2 hour charging time.
- Press START for 8 seconds to force turn off your Arcade Stick.

Power Saving


- Joystick enters sleep mode in 1 minute with no Bluetooth connection.
- Joystick enters sleep mode in 15 minutes with no use.
- Use the joystick to wake your N30 Joystick.

Support

- Please visit support.8bitdo.com for further information and additional support.

Xinput, Dinput, X/Y, DPAD,
TURBO, PAIR, SELECT

START

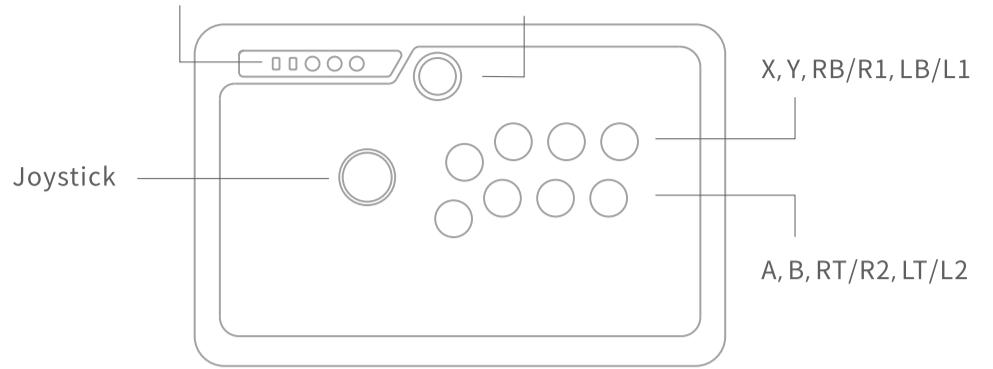

蓝牙连接

- 连接过的设备下次使用会自动连接

Android

- 将 Xinput/Dinput 开关拨到 Dinput, 按 [START] 键开启街机摇杆, 指示灯 1 下/次闪烁。
 - 按住 [PAIR] 键 2 秒进入配对状态, 蓝色指示灯快速闪烁。
 - 打开 Android 设备蓝牙, 搜索 [8Bitdo xx Arcade] 设备, 点击连接, 连接成功后蓝色指示灯常亮。
- USB 有线连接: 请在第 1 步开启街机摇杆后, 用 USB 线连接设备

Windows

- 将 Xinput/Dinput 开关拨到 Xinput, 按 [START] 键开启街机摇杆, 指示灯 2 下/次闪烁。
 - 按住 [PAIR] 键 2 秒进入配对状态, 蓝色指示灯快速闪烁。
 - 打开 Windows 设备蓝牙, 搜索 [8Bitdo xx Arcade(x)] 设备, 点击连接, 连接成功后蓝色指示灯常亮。
- USB 有线连接: 请在第 1 步开启街机摇杆后, 用 USB 线连接设备; 可使用开关切换 Xinput/Dinput 工作模式

macOS

- 将 Xinput/Dinput 开关拨到 Dinput, 按 [START+A] 键开启街机摇杆, 指示灯 3 下/次闪烁。
 - 按住 [PAIR] 键 2 秒进入配对状态, 蓝色指示灯快速闪烁。
 - 打开 macOS 设备蓝牙, 搜索 [Wireless Controller] 设备, 点击连接, 连接成功后蓝色指示灯常亮。
- USB 有线连接: 请在第 1 步开启街机摇杆后, 用 USB 线连接设备

Switch

- 将 Xinput/Dinput 开关拨到 Dinput, 按 [START+Y] 键开启街机摇杆, 指示灯 4 下/次闪烁。
 - 按住 [PAIR] 键 2 秒进入配对状态, 蓝色指示灯快速闪烁。
 - 打开 Switch 主机 Controllers 设置, 进入 Change Grip/Order 界面, 等待连接, 连接成功后蓝色指示灯常亮。
- 连接成功后, SELECT + DOWN 为 Switch 主机的 HOME 键

电池

八位堂 N30 Arcade Stick 内置 480mAh 锂电池, 可持续使用约 18 小时; 可使用配备的 USB 线进行充电, 充电时间约 1~2 小时, 充电完成后绿色指示灯熄灭。
指示灯状态: 红灯亮, 电量不足。绿灯亮, 充电中。

- 充电时长及续航时间可能受环境因素影响会有所不同

自动休眠

使用蓝牙连接时, 1分钟内未连接蓝牙或连接后15分钟无操作时, 摇杆将进入自动休眠状态。
使用USB连接时, 街机摇杆会保持连接不休眠。

- 按 START 键唤醒街机摇杆

固件升级

- 请访问 support.8bitdo.cn 了解详细信息。